

TYP W-PVK




MODEL

W PVK



CATALOGUE OF EQUIPMENT

6.7. REFRIGERATED DISPLAY CASES , LINE "W-PVK"

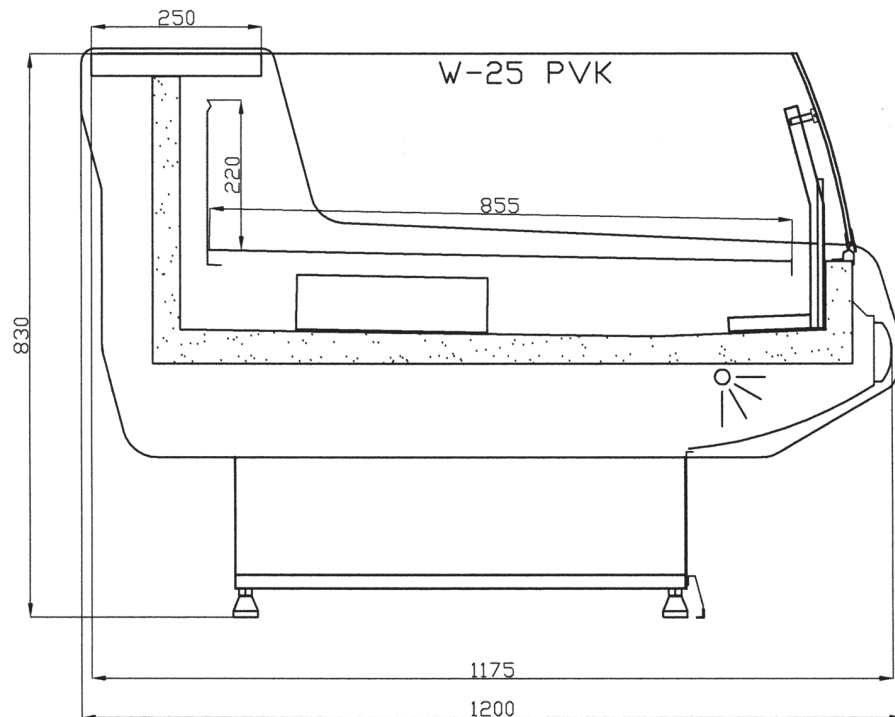

Refrigerated display case "W-PVK" - depth 1200 mm, height 830 mm

DESCRIPTION OF INSTALLATION

A refrigerated display case, series W-PVK, is the latest product manufactured by COLD Company. This is an extremely light case, endowed with excellent proportions, designed for self-service shops.

Manufactured either with a generating set or is adapted to an external supply system. Can be arranged in lines.

ANOTHER OPTION TO BE SPECIFIED IN ANY ORDER IS THE BASE:

- full base
- leg with generating set
- leg without generating set (for external supply)

„COLD” Sp.j. Bogdan Chwastek i Włodzimierz Chwastek
32-700 Bochnia, ul. Łany 6, Poland, tel./fax +(48 14) 611-15-80 to 82, 611-28-81 to 82



CATALOGUE OF EQUIPMENT

INSTALLATION CHARACTERISTIC

Cooling	- dynamic
Condensing unit	- DANFOSS (Germany)
Refrigerant	- R 507
Nominal voltage	- 230V 50Hz
Defrosting	- automatic
Interior temperature range	- +2°C do +8 °C (at ambient temperature +25°C and relative humidity. 60%)
Window panel	- curved, hardened
Working top	- stainless steel or granite
Internal illumination	- OSRAM fluorescent lamps (meat, cured meat or dairy products) Illumination in the lower part of the case frame
Sides	- PU foam insulated stuff
Insulation	- rigid PU foam
Exposition area	- acidproof, stainless sheet
Extra finishing options	- night time covers, dynamic cooling (air supply), bread/cheese board, customer's shelve (rail), paper bin, knife holder, scales shelf, granite work surface, socket.
Arrangement in line	- adaptation

TABLE 6.7-1

Case symbol	Total length [mm]	Exposition area of shelves [m ²]	Net capacity [litres]	Nominal refrigerating effect [W]	Device weight [kg]
W-12 PVK	1352	1,06	258	600	
W-20 PVK	2080	1,71	414	950	
W-25 PVK	2580	2,14	517	1050	
Nominal refrigerating effect for $t_0 = -15^{\circ}\text{C}$					

NOTES

In any order please specify the case symbol from the respective table field, and underline clearly the color of decorative and finishing details.

Please also indicate the type of the cooling system:

- dynamic cooling system (ventilated) - W-PVK
- static cooling system (natural) - W-PSK

COLOURING IF DECORATIVE AND FINISHING ELEMENTS

Exemplary colors for case frame:

- red, blue, green, yellow

Stop profiles can be supplied in the following colors:

- black, grey

„COLD” Sp.j. Bogdan Chwastek i Włodzimierz Chwastek
32-700 Bochnia, ul. Łany 6, Poland, tel./fax +(48 14) 611-15-80 to 82, 611-28-81 to 82

