MKF 1064 TS

















Electric combi oven with touch screen 10 trays 600 x 400 mm

Plus

Patented fan guard system Airflowlogic™ Patented system for direct steam **Humilogic™**

Patented system for cooking chamber drying **Drylogic™**

Voltage (V) : AC 220/230 3 Available on request at the order Left side opening door

Humidity management software

Wi-Fi communication system

Knob for quick selection of the touch screen

Programmable oven start


N°40 recipes stored

Control panel in 40 languages:

Arabic, Armenian, Azerbaijani, Bahasa (Indonesia), Bahasa (Malaysia), Bosnian, Bulgarian, Czech, Chinese, South Korean, Croatian, Danish, Philippine, Finnish, French, Georgian, Japanese, Greek, English, Icelandic, Italian, Kazakh, Lithuanian, Norwegian, Dutch, Persian (Iran), Polish, Portuguese, Romanian, Russian, Serbian, Slovenian, Spanish, Swedish, German, Thai, Turkish, Ukrainian, Hungarian, Vietnamese


HACCP system

Adjustable door hinges

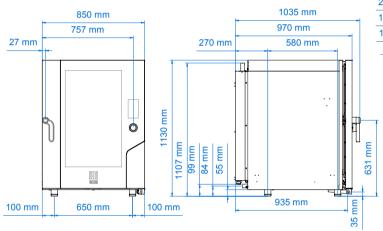

MILLENNIAL means to think big, to allow you to always cook grand. With EKF 1064 TS you can choose between convection cooking and direct steam combined cooking. You will have ten trays, nine cooking steps, five speeds and 500 recipes.



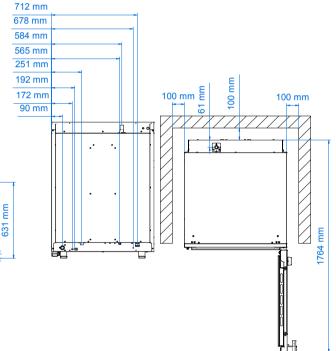

Dimensional features

Dimensions (WxDxH mm)	850 x 1035 x 1130
Weight (kg)	146
Distance between rack rails (mm)	80

Electrical features

Electrical leatures	
Power supply (kW)	17
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	3 bidirectionals
Boiler (kW)	/
Protection against water	IPX5

Functional features	
Power	Electricity
Capacity	N° 10 trays/grids 600 x 400 mm
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	Digital probe thermometer
Control panel	Touch screen
N° programs	500
Programmable cooking steps	10
Pre-heating temperature	180 ℃
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	Yes
Feet	Adjustable

Equipment

Cardboard box dimensions with pallet (WxDxH mm)	910 x 1090 x 1295 mm	
Lateral supports	1 right + 1 left	
Cable	Three-phase+neutral [5G 4]-L=1600 mm	
USB port		
Multipoint core probe, cod. Mł	KSCMU	
Plug for "vacuum cooking" pro	bbe cod. MKSCSV	
Automatic washing system int	egrated	
Condensate collection bowl, w	ith drain on door	
Hinge with door locking for op	penings adjusted at 60°, 90°, 120°, 180°	

Optionals	
Aluminium tray 600 x 400 mm	KT9P/A
Perforated aluminium tray 600 x 400 mm	KTF8P/A
5 lanes perforated and corrugated aluminium tray 600 x 400 mm	KTF9P
5 lanes AISI 304 grid 600 x 400 mm	KG5CPX
Chromed grid 600 x 400 mm	KG9P
Table	MKTS 64
Table for overlapping ovens	MKT 64 D
Proofer and holding cabinet	MKLM 1064
Condensation hood	MKKC 610
Kit for overlapping ovens	MKS 64
Smoker	MKAF
Multi-point core probe	MKSCMU
Vacuum cooking core probe	MKSCSV
Support for core probe	MKSSC
Detergent and rinse aid	MKDET
Spray kit with support and tube	EKKD