

EVEREST DP



STANDARD EQUIPMENT

- Energy-efficient LED lighting
- Energy-saving refrigerating unit
- Solid sides (thickness 40 mm), insulated (sides with glazing - option)
- Interior and shelves made of galvanized sheet metal (white powder-coated)
- Display shelves with adjustable height and suspension angle
- Label holders
- Front bumper – a choice of colours (grey, black, red)
- Condensate drain to the sewers
- Defrosting: automatic
- Opening door, self-closing
- Feet for levelling the device
- Expansion valve


INTERIOR TEMPERATURE RANGE +2°C TO +8°C *

DYNAMIC COOLING

MODULAR SYSTEM

REFRIGERANT 449A

INTERNAL UNIT

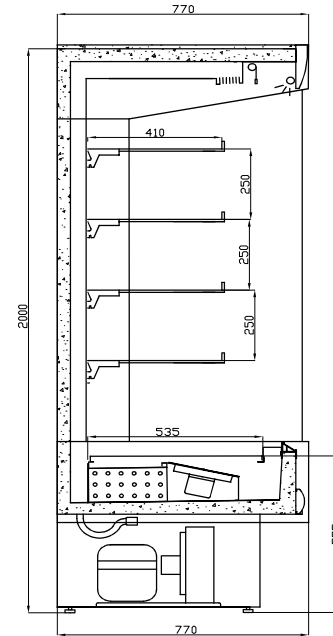

MODULES

SYMBOL	LENGTH INCLUDING SIDES* [MM]	DISPLAY AREA [m ²]	UNIT	NUMBER OF DOORS	WEIGHT [kg]
R-12 E DP	1220	2,73	+	2	215
R-15 E DP	1580	3,29	+	2	300
R-19 E DP	1930	3,90	+	3	390
R-25 E DP	2560	5,33	+	4	505

ALTERNATIVE VERSIONS



MULTIDECK DEPTH



MULTIDECK HEIGHT



SLIDING DOOR



OPENING DOOR



Cooling capacity requirements at $t_v = -15^\circ\text{C}$: 900 W/linear meter

*At an ambient temperature of +25°C and humidity of 60%
**Side thickness 40 mm

