




GENERAL FEATURES | CARATTERISTICHE GENERALI

MODEL MODELLO	S901 S/S TOP	S903 S/S TOP	S901-2D	S901-4D
Stainless steel exterior and interior Corpo esterno e interno in acciaio inox	✓	✓	✓	✓
Foaming agent cyclopentane Schiumatura in ciclopentano	✓	✓	✓	✓
GN1/1 refrigerated saladette Saladette refrigerata GN1/1	✓	✓	✓	✓
Static cooling Refrigerazione statica	✓	✓	✓	✓
Automatic defrost Sbrinamento automatico	✓	✓	✓	✓
Dixell Blue Line digital thermostat Termostato digitale Dixell Blue Line	✓	✓	✓	✓
Engine room key fitted as standard Serratura vano motore di serie	✓	✓	✓	✓
Number of drawers ½ with telescopic guides Numero di cassette ½ con guide telescopiche	-	-	2	4
Adjustable feet Piedini regolabili	✓	✓	✓	✓
Removable gasket Guarnizione estraibile	✓	✓	✓	✓

TECHNICAL SPECIFICATIONS | SPECIFICHE TECNICHE

MODEL MODELLO	S901 S/S TOP	S903 S/S TOP	S901-2D	S901-4D
EXTERNAL DIMENSIONS (WxDxH mm) DIMENSIONI ESTERNE (LxPxH mm)	900x700x850	1365x700x850	900x700x850	900x700x850
NET CAPACITY (lt) CAPACITÀ (l)	240	368	240	240
TEMPERATURE TEMPERATURA (°C)	+2~+8	+2~+8	+2~+8	+2~+8
REFRIGERANT REFRIGERANTE	R134a	R134a	R134a	R134a
DEFROST SBRINAMENTO	Automatic Automatico	Automatic Automatico	Automatic Automatico	Automatic Automatico
COMPRESSOR COMPRESSORE	Zanussi	Danfoss	Zanussi	Zanussi
INPUT POWER ASSORBIMENTO (W)	260	260	260	260
NET WEIGHT PESO NETTO (kg)	70	107	73	76

DETAILS | DETTAGLI

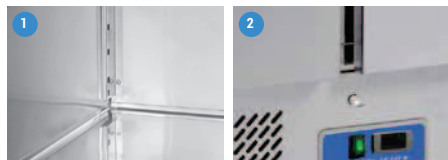

- 1) Curved edge for easy cleaning | Angoli interni arrotondati per una facile pulizia
- 2) Engine room key fitted as standard | Serratura vano motore di serie

CERTIFICATIONS | CERTIFICAZIONI



S901 S/S TOP

+2° | +8°



S901-2D

+2° | +8°



S901-4D

+2° | +8°