

TYP S



MODEL

S 700

Solid
base cabinet

MODEL

S 1400

Double-door base cabinet



TYP S



MODEL

S 700 A/G

Refrigerated cabinet
– condensing unit in the upper part

MODEL

S 1200 A/G

S 1400 A/G


Refrigerated cabinet
– condensing unit in the upper part



Colb®

CATALOGUE OF EQUIPMENT

5.1. REFRIGERATED CABINETS WITH FULL INSULATION - series „S, S A/G”

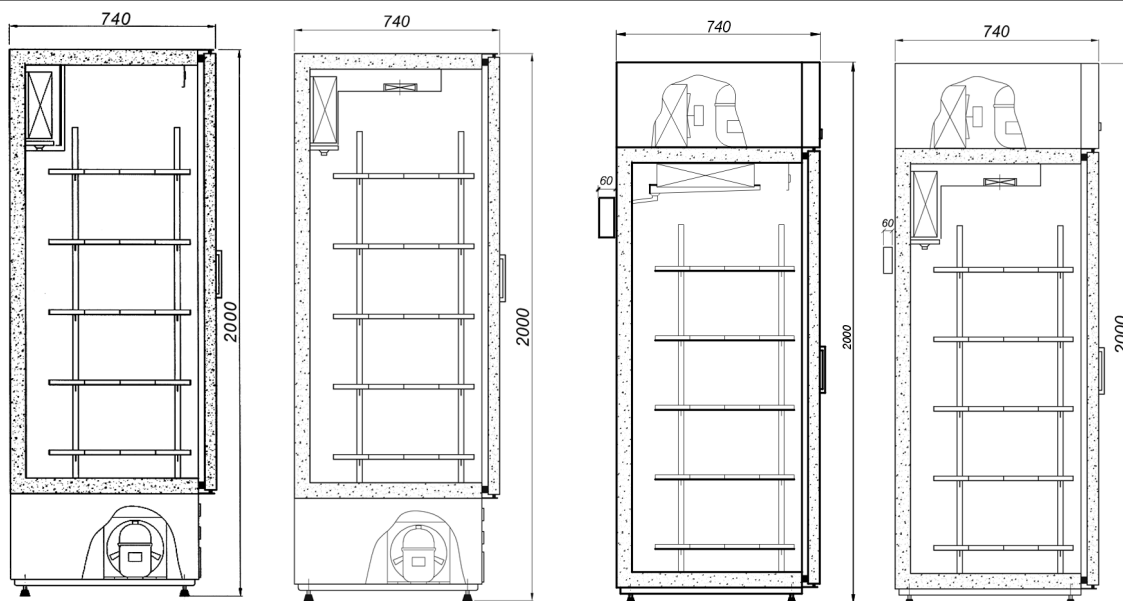

Refrigerated cabinets „S”	Refrigerated cabinets „S A/G”
	Refrigerators with upper condensing unit and automatic defrost water evaporation.

DESCRIPTION OF INSTALLATION

Refrigerated cabinets - series „S” - are very useful for storage products in back rooms. These shelves have solid, high quality construction.

INSTALLATION CHARACTERISTIC

Cooling	- gravitation or forced air circulation
Condensing unit	- DANFOSS (Germany)
Refrigerant	- R 507
Voltage rating	- 230V 50Hz
Defrost	- automatic
Inner range temperature	- -1°C to $+8^{\circ}\text{C}$ (if surroundings temp. is $+25^{\circ}\text{C}$ and relative humidity 60%)
Shelves	- with adjustable high, coated with PE
Doors	- opened, one - or two-wing

TABLE 5.1-1

Cabinet symbol	Depth [mm]	Total length [mm]	Doors	Loading area [m ²]	Rated refrigerating capacity [W]	Equipment mass [kg]
S - 700	740	830	single	2.15	494	116
S - 1200	740	1420	double	3.69	634	171
S - 1400	740	1620	double	4.30	634	188

Rated refrigerating capacity for $t_0 = -15^{\circ}\text{C}$

In refrigerators with upper refrigerating unit the depth is increased by 60 mm.

„COLD” Sp.j. Bogdan Chwastek i Włodzimierz Chwastek
32-700 Bochnia, ul. Łany 6, Poland, tel./fax +(48 14) 611-15-80 to 82, 611-28-81 to 82

