


BLAST CHILLER (plug-in)

WORK MODES:
SOFT (COOLING +3°C);
HARD (FREEZING -36°C)



DEPTH 740mm

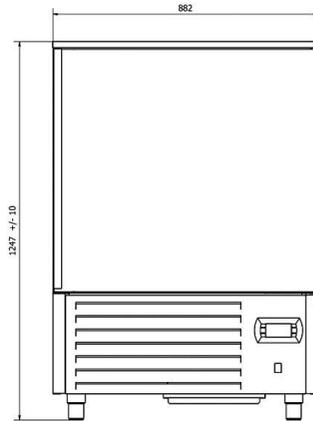

STANDARD EQUIPMENT

	PLUG-IN
COOLING AGGREGATE PLACED ON THE BOTTOM	✓
ENERGY EFFICIENT COOLING AGGREGATE	✓
DYNAMIC COOLING	✓
SIDE-HUNG DOOR, FULL, POSSIBILITY TO CHOOSE THE DIRECTION OF OPENING	✓
»UV« ANTI-BACTERIAL FLUORESCENT TUBE	✓
RACK FOR G/N CONTAINERS	✓
GN CONTAINERS (SZ6GN -3PCS; SZ12GN - 6SZT)	✓
INTERIOR MADE OF ACID-RESISTANT STAINLESS STEEL	✓
EXTERNAL HAUSING MADE OF ACID-RESISTANT STAINLESS STEEL	✓
ECOLOGICAL POLYURETHANE FOAM INSULATION	✓
ELECTRONIC TEMPERATURE CONTROLLER WITH DIGITAL DISPLAY	✓
AUTOMATIC CONDENSATE EVAPORATION	✓
DEFROSTING: AUTOMATIC	✓
FEET FOR LEVELLING THE DEVICE	✓



DYNAMIC COOLING



INTERNAL AGGREGATE



REFRIGERANT R290

OPTIONAL EQUIPMENT

	NOTES	U
ADDITIONAL GN 1/1 CONTAINER		PCS
TEMPERATURE RECORDER (USB)		PCS
SET OF WHEELS (CASTERS)		SET
WOODEN PALLET	CALCULATED ACCORDING TO LENGTH (NO DISCOUNT)	LM
WOODEN CRATE	CALCULATED ACCORDING TO LENGTH (NO DISCOUNT)	LM

ID	NAME	LENGTH [mm]
BLAST CHILLER		
SZ-6 GN1/1	BLAST CHILLER- 6GN	882
SZ-12 GN1/1	BLAST CHILLER- 12GN	882