


KIT DRAIN PIPE and TANK OVENS FCF 6-10

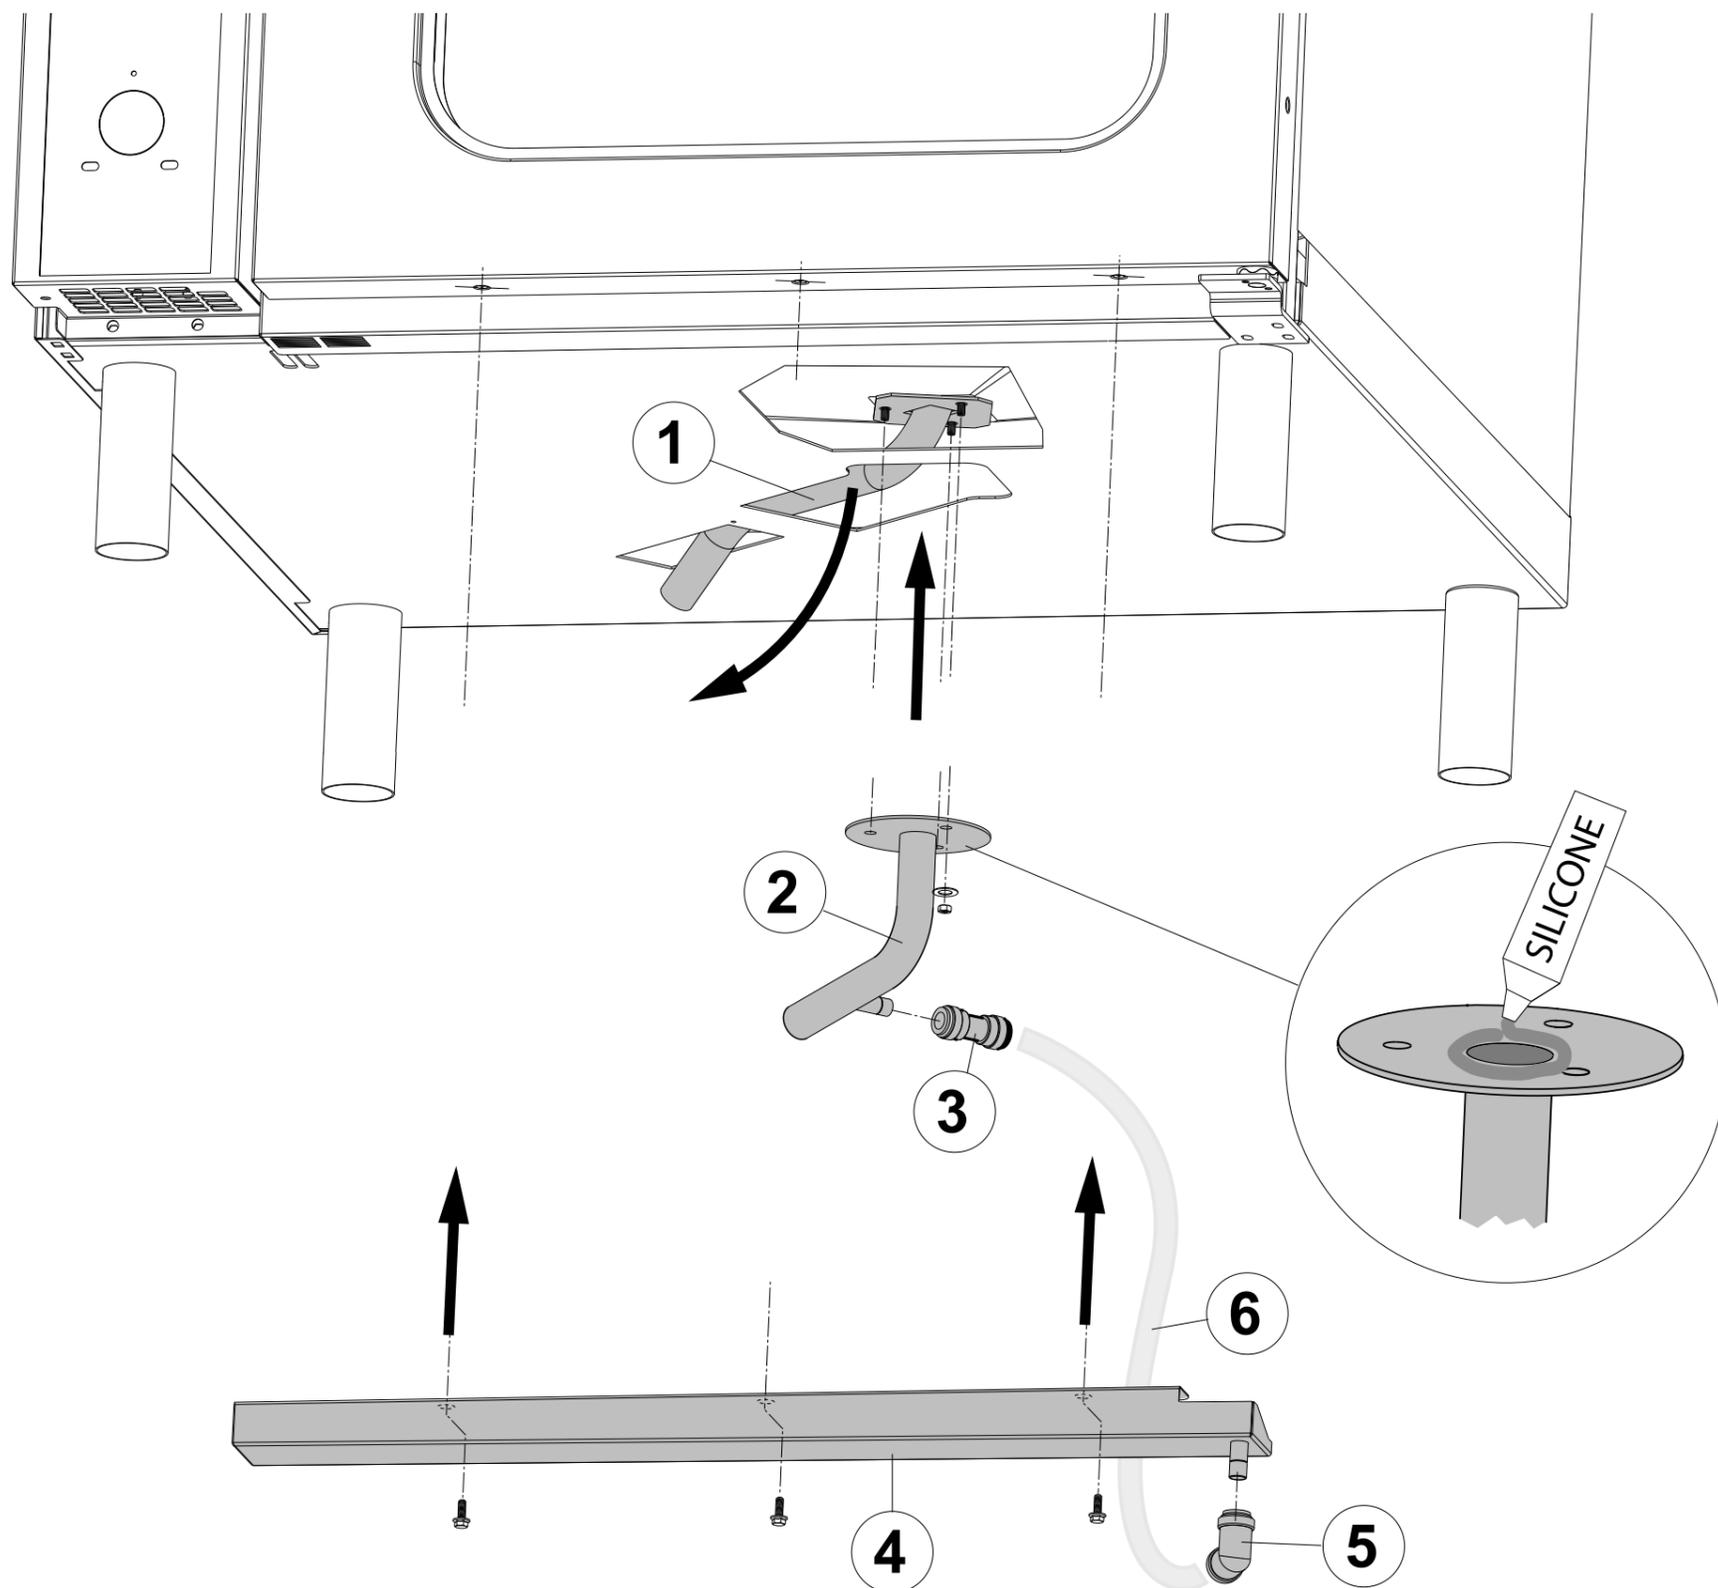

- 1) Remove the existent drain pipe.
- 2) Fix the new drain pipe with SILICONE and lock it with existent nuts and washers M5
- 3) Fix the straight connection to the new drain pipe
- 4) Fix the metal tank to the bottom of the door with the enclosed screw M5 x 14
- 5) Fix the elbow connection to the drain of the tank
- 6) Connect the flexible pipe to the elbow connection of the tank and to the straight connection

DOC. NO. **5954 00G 00**
EDITION 1 E-Z-A 1309