


# MKF 711 BM



**Electric combi oven 7 trays 1/1 GN  
with digital touch panel with  
BLACK MASK technology**

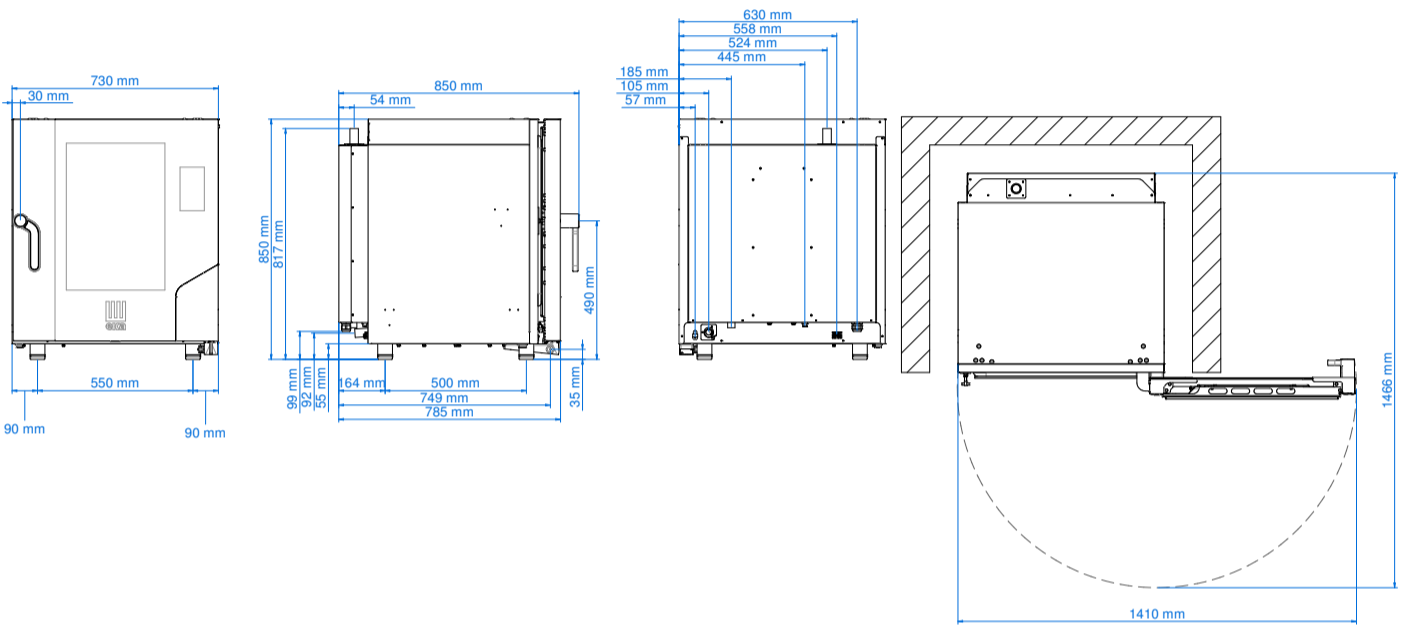

## Dimensional features

Dimensions (WxDxH mm)	730 x 849 x 850
Weight (kg)	96
Distance between rack rails (mm)	68

## Electrical features

Power supply (kW)	10,4
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	2 bidirectionals
Boiler (kW)	/
Protection against water	IPX4

## Functional features

Power	Electricity
Capacity	7 trays/grids 1/1 GN
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	Digital probe thermometer
Control panel	Black mask electronic control
N° programs	100
Programmable cooking steps	10
Pre-heating temperature	180 °C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	Yes
Feet	Adjustable

## Optionals

Condensation hood	<b>MKKC 711</b>
Kit for overlapping ovens	<b>MKS 11</b> <b>MKST 711</b>
Tables	<b>MKTS 11</b> <b>MKT 11 D</b> <b>MKTPL</b>
Holding cabinet	<b>MKM 1211</b>
Other accessories	Available in the dedicated section

## Equipment

Cardboard box dimensions with pallet (WxDxH mm)	790 x 905 x 1016 mm
Lateral supports	1 right + 1 left
Cable	Three-phase+neutral [5G 2,5]-L=1600 mm
USB port	
Core probe predisposition	
Automatic washing system predisposition	
Condensate collection bowl, with drain on door	
Hinge with door locking for openings adjusted at 60°, 90°, 120°, 180°	

## Plus

Patented fan guard system <b>Airflowlogic™</b>	
Patented system for direct steam <b>Humilogic™</b>	
Available on request at the order	Voltage (V) : AC 220/230 3 PH Left side opening door
Humidity management software	
Programmable oven start	
N° 40 recipes stored	
HACCP system	
Adjustable door hinges	