

TYP W-PVP




MODEL

W PVP



CATALOGUE OF EQUIPMENT

6.5. REFRIGERATED DISPLAY CASE series „W-PVP”

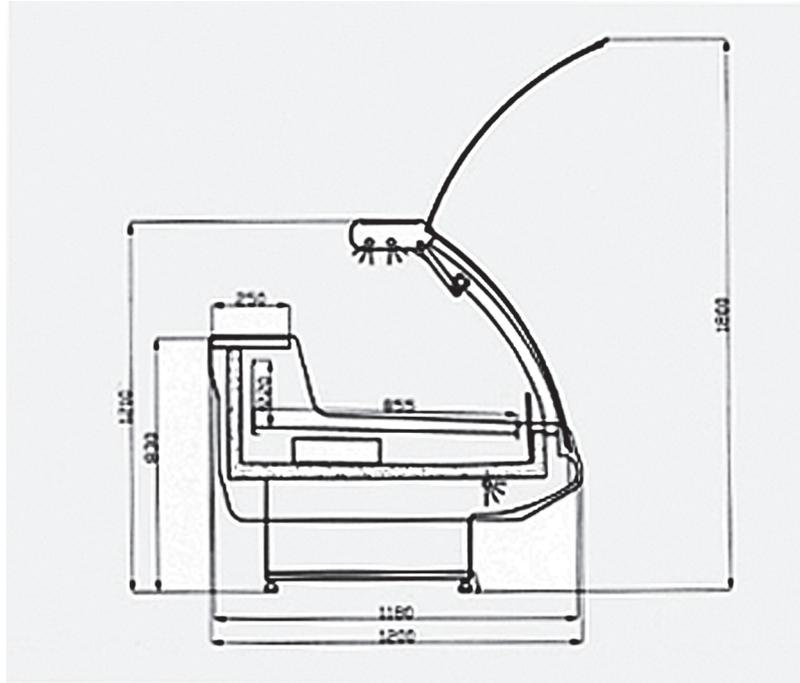

Display case "W-PVP" – depth: 1200

DESCRIPTION OF INSTALLATION

A refrigerated display case, series W-PVP, is the latest product manufactured by COLD Company. This is a modern design whose qualities is lightness combined with a large, well illuminated exposition area. Its main asset is a new glass lifting system which works very swiftly and precisely. In addition, the case is provided with a very large unrefrigerated compartment situated in its lower part. This device is made either with a supply unit or is adapted to an external source of supply. The case can be arranged in a series.

ANOTHER OPTION TO BE SPECIFIED IN ANY ORDER IS THE BASE:

- full base
- leg with unit
- leg without unit (for external supply)

„COLD” Sp.j. Bogdan Chwastek i Włodzimierz Chwastek
32-700 Bochnia, ul. Łany 6, Poland, tel./fax +(48 14) 611-15-80 to 82, 611-28-81 to 82



CATALOGUE OF EQUIPMENT

INSTALLATION CHARACTERISTIC

Cooling	- dynamic
Condensing unit	- DANFOSS (Germany)
Refrigerant	- R 507
Nominal voltage	- 230V 50Hz
Defrosting	- automatic
Interior temperature range	- +2 °C do +8 °C (with external temp. +25 °C and relative humidity 60%)
Window panel	- curved, tempered
Working top	- stainless steel or granite
internal illumination	- OSRAM fluorescent lamps (meat, cured meat or dairy products) Illumination in the lower part of the case frame
Sides	- PU foam insulated material
Insulation	- rigid PU foam
Exposition area	- stainless steel
Extra finishing options	- night time shutters, gravitation cooling, chopping board, customer's rail [shelf], paper bin, knives holder, scales shelf, granite top, socket.

TABLE 6.5-1

Case symbol	Total length [mm]	Exposition area of shelves [m ²]	Net capacity [litres]	Nominal refrigerating effect [W]	Device weight [kg]
W-12 PVP	1352	1.06	259	600	
W-20 PVP	2080	1.71	414	950	
W-25 PVP	2580	2.14	517	1050	
Nominal refrigerating effect for $t_0 = -15\text{ }^{\circ}\text{C}$					

NOTES

Please specify in the order the case symbol from the respective table window, and mark clearly the finishing and decorative colors.

COLOURING IF DECORATIVE AND FINISHING ELEMENTS

Exemplary colors for case frame:

- red, blue, green, yellow

Stop profiles can be supplied in the following colors:

- black, grey

„COLD” Sp.j. Bogdan Chwastek i Włodzimierz Chwastek
32-700 Bochnia, ul. Łany 6, Poland, tel./fax +(48 14) 611-15-80 to 82, 611-28-81 to 82

